

# MipCam®

Mobil ip-Camera

NKIP613-3G




## Egenskaper/Funktionalitet:

Automatisk inspelning i kamera på SD minneskort vid rörelse i bilden ( max 16Gb, ingår ej) Protokoll för NAS (hårddiskinspelning på nätverket) och programvara till Smartphone & PC för 1-36 kameror ingår.

För utomhusbruk. Klarar väder och vind.

- + Extrem enkel P2P/In installation
- + Up & Go på Smartphone/PC 5min
- + Se med iPhone/ Android/ PC /Mac
- + Högupplösande >640x480, 25bilder/s
- + IR som ser >15m i totalt mörker
- + 2 vägs ljud med mick & högtalare
- + Inspelning på SD kort >16Gb
- + Rörelsestyrd inspelning > 4 fält
- + H264, MPEG-4, M-JPEG kompri
- + > 16st kan se samtidigt
- + Väderbeständig ner till -20grader

SmartPhone & PC installationen tar max ca 3-5 min.

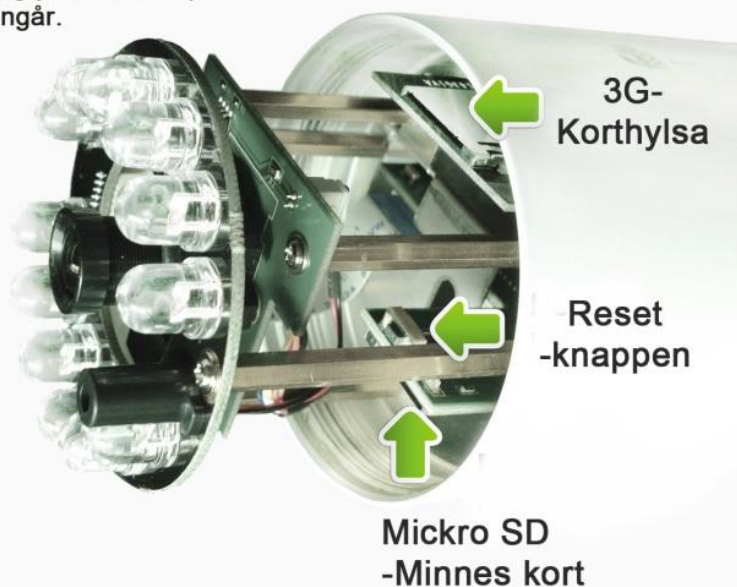

Modelnr: NKIP613-3G-1



Items	
3G	YES
P2P	YES
IR-Cut	YES
Viewing Angle	Horizontal: 60°, Vertical: 45°
Night Vision Distance	15 m
LEDs	12
Focal Length	F=4.3 mm
SD Card Support	YES
Dimensions (W x D x H)	70 mm X 70 mm X 190 mm
Weight (Main Body)	700 g
Power Requirements	DC 12V
Power Consumption	3.75 W
Image Compression	H.264, MPEG 4, M-JPEG
Image Resolution	640 x 480 ( VGA ), 320 x 240 ( QVGA ), 160 x 120 ( QQVGA )
Max. Frame Rate	30 fps @ 640 x 480
Audio Compression	AAC, AMR
Simultaneous Viewers	16
Authentication	ID / Password, Administrator / General User ( Up to 64 )
Network Protocols	TCP, UDP, IP, ARP, ICMP, DHCP, DNS, HTTP, FTP, SMTP, NTP, PPPoE, UPnP, DDNS
Stream Type	HTTP, RTSP / RTP / RTCP, 3GPP
Network Connection	Ethernet ( 10 BASE-T / 100 BASE-TX )
Wireless Technology	IEEE 802.11 b/g/n
Frequency	UMTS: Quad band, 850/900/1900/2100MHz    HSUPA /HSDPA: 850/900/1900/2100MHz GPRS/GSM/EDGE:Quad band:850/900/1800/1900MHz
Transmission Speed	150 Mbps / 54 Mbps / 5.5 Mbps / 2 Mbps / 1 Mbps ( Auto Switch )
Security	WEP ( 64 / 128 bit ), WPA-PSK ( AES / TKIP ), WPA2-PSK ( AES / TKIP )
Min. illumination	1.0 Lux
Image Device	1 / 4" CMOS
Pixels	310,000 ( VGA )
Built-in Microphone	Electret Condenser Microphone
Operating Temperature	-20 to +60 °C ( -4 to +140 °F )
Storage Temperature	-20 to +60 °C ( -4 to +140 °F )
Operating Humidity	20~90 % RH ( Non-condensing )
Storage Humidity	20~95 % RH ( Non- condensing )
Operating System	Windows 2000 / XP / Vista / Win 7, Mac, Linux, iphone, Android, Windows Mobile, BlackBerry
Processor	Intel Pentium III, 1 GHz or Higher
Memory	256 MB RAM Minimum
Internet Browser	Microsoft IE version 5.5 or later, Safari, Mozilla, Firefox, Google Chrome and most other browsers